



Magnet Encoder 22-30 1000CPT, 3Channels

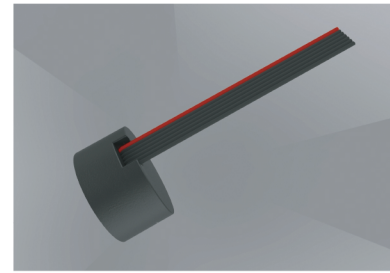

D=22 (DR2224B, DR2232B, DR2332B, DR2347B Use)
 D=30 (DR3068B, DR3571B, DR4071B Use)

Type	
Counts per turn	1000
Number of channels	3
Max. operating frequency (kHz)	20
Max. speed (rpm)	28000

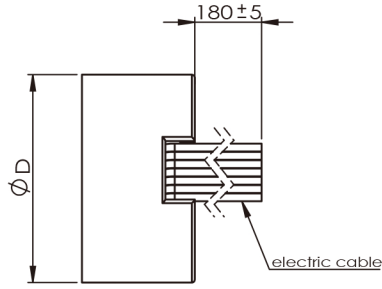

Modular System						
+电机 +Motor	页码 Page	总长度A Overall length A	产品型号 Part Number	+减速机 +Gearhead	总长度 B Overall length B	· 参见减速机 · See Gearhead
DR2224B	20	30.6	SR2231	P22H	·	
DR2232B	21	38.3	SR2238	P22H	·	
DR2332B	22	38.3	SR2338	P22H	·	
DR2347B	23	53.3	SR2353	P22H	·	
DR3068B	24	81	SR3081	P32H	·	
DR3571B	25	85	SR3585	P35H	·	
DR4071B	26	85.5	SR4086	P42H	·	

Technical Data	
Supply voltage V_{CC}	5V
Output signal $V_{CC} = 5VDC$	TTL compatible
Phase shift Φ	$90^\circ \pm 45^\circ$
Power input at $V_{CC} 5VDC$	max. 15 mA
Inertia of the magnetic disc	0.07 gcm ²
Operating temperature range	-20...+85° C

